


Fresco 9000 MaXX

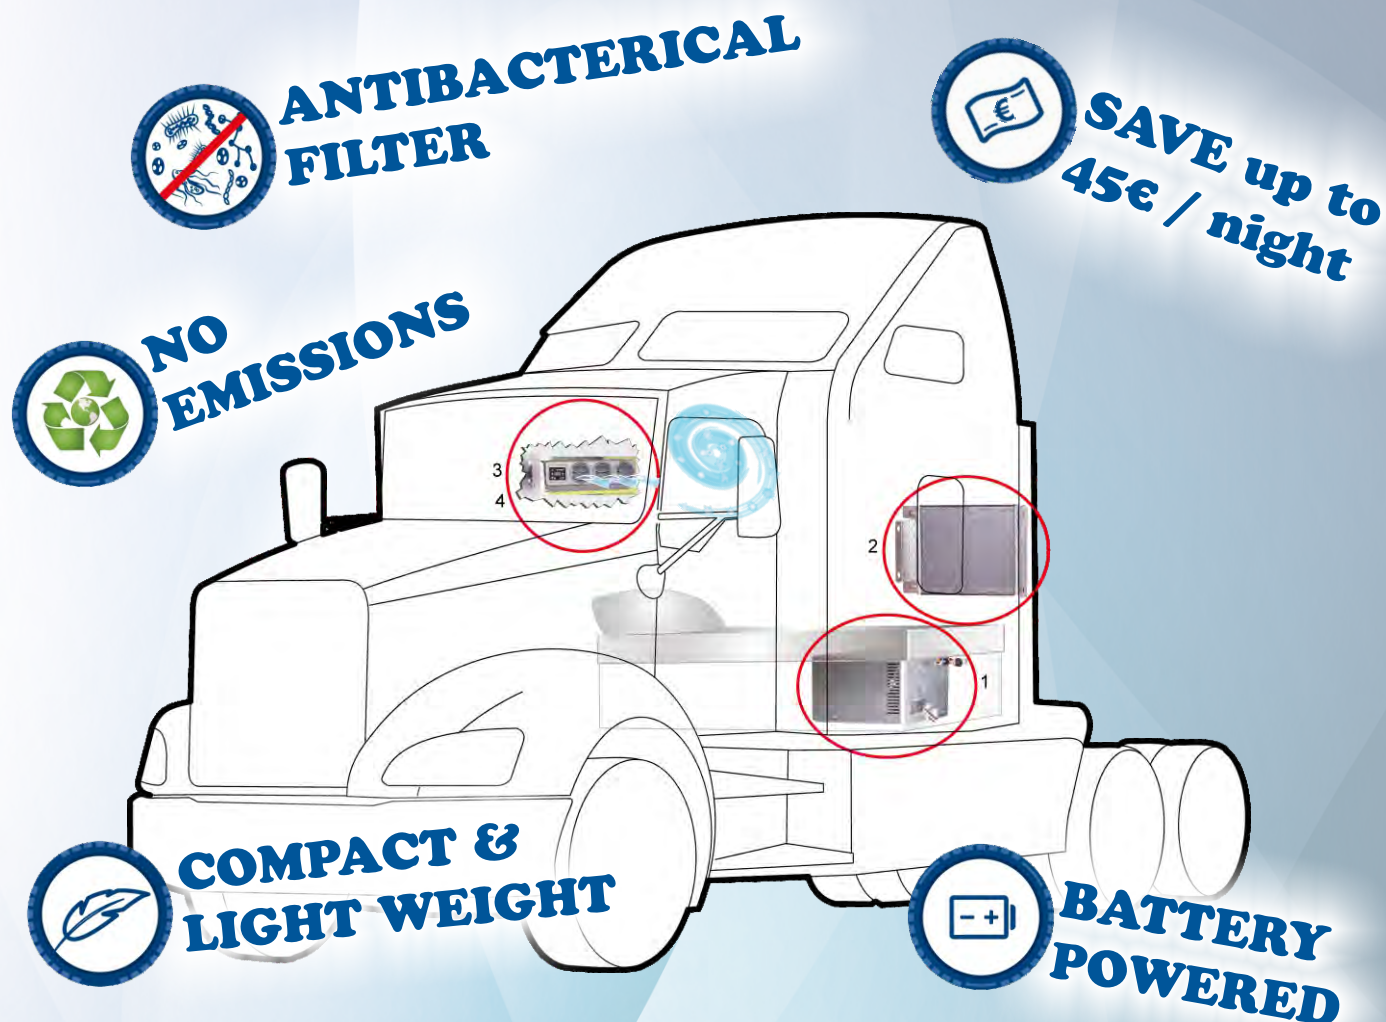

SAVINGS

- Save up to 45€ per night in fuel
- Reduced maintenance costs

QUIET & EFFICIENT

- Silent - DC Scroll compressor
- High mounted evaporator delivers superior cooling

QUIET & POWERFUL

- Three speed evaporator fan
- 9,000 BTUs of TRUE air conditioning power

BUILT TO LAST

- Solid aluminium core condenser mounted in SS bracket
- System compressor mounted inside, under sleeper bed

2 TLS

- 2 Truck Life System

LOW MAINTENANCE

- Seasonal - Condenser core washout & battery maintenance

EASY TO INSTALL

- Compact three (3) component modular system
- Light weight components - total 24 kg

SPECIFICATION

System application	Class 6 - 7 & 8 Mid to Large size sleeper units
Truck fitment	UNIVERSAL - all makes and models
System run time	10 to 14 hours (on auxiliary battery)
Refrigerant	R134a (CFC free)
Voltage	12 VDC
Max cooling capacity	9,000 BTUs *
Power consumption	Up to 55 AMPS/hour **
Battery protection	10.8 VDC - low voltage disconnect
Fan speed	Three (3) - 265 CFM
Alternator	Minimum Spec 180 AMP
Total weight	System - 27 kg / with battery pack - 177 kg
Sleeper air filter «NEW»	«Saniclimafilter» removes airborne bacteria and odors within 120 minutes
2 TLS	Available second truck re-installation kit

MODULAR COMPONENT FEATURES

1 - COMPRESSOR BOX

- Scroll compressor / sealed electronics
- Compact: 200 x 220 x 360 (H x W x D) - 11,8 kg
- Installs easily under sleeper bed
- Utilizes less under sleeper bed space than competitive systems



2 - CONDENSER UNIT

- Aluminium condenser mounted on stainless steel mounting bracket
- Compact: 354 x 544 x 155 (H x W x D) - 7 kg
- Installs high on rear exterior sleeper wall for best performance




3 - EVAPORATOR

- Cabinet or shelf mount unit with an easy to read digital display
- Compact & light weight: 135 x 385 x 330 (H x W x D) - 5,2 kg
- Installed high in sleeper converting hot sleeper air into cold dry air
- Driver sets temperature - system automatically maintains temperature
- On-board system diagnostics



4 - «SANICLIMAFILTER»

- Anti-bacterial unit removes air-borne bacteria, «improving drivers' health»
- Can be operated while driving or during No-Idle operation
- Service life: 40,000 hours

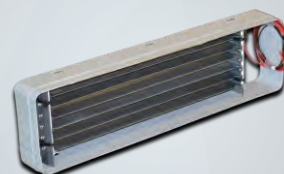

* (at 89.6° F / 32° C ambient temperature)
 ** (STANDARD SETTINGS)



Autoclima S.p.A. - 10020 Cambiano (TO) - ITALY
 Via Cavalieri di Vittorio Veneto, 15 - Tel. 011.94.43.210 - Fax 011.94.43.230
 Internet: <http://www.autoclima.com> e-mail: sales@autoclima.com



Autoclima DEUTSCHLAND GMBH (Frankfurt)
 Gustav-Heinemann-Straße 7 - 64572 Klein-Gerau - Deutschland
 Tel: +49 (6152) 187799 - 0 / Fax: +49 (6152) 187799 - 9
 Internet: <http://www.autoclima.com> e-mail: p.romann@autoclima.de